

Configuration Guide for Yealink IP Phone & RingCentral server

Contents


- 1. REQUIREMENTS AND PREPARATION2
- 2. CONFIGURE YEALINK IP PHONE2
 - 2.1 LOGIN TO WEB MANAGEMENT 2
 - 2.2 CONFIGURE THE ACCOUNT SETTINGS 3
- 3. CONFIGURE ON RINGCENTRAL4
 - 3.1 LOGIN TO RINGCENTRAL 4
 - 3.2 SIP ACCOUNT INFORMATION 5
- REFERENCE6

1. Requirements and Preparation

- Software image x.60.x.x or higher running on the Yealink IP Phone.

2. Configure Yealink IP Phone

2.1 Login to WEB management

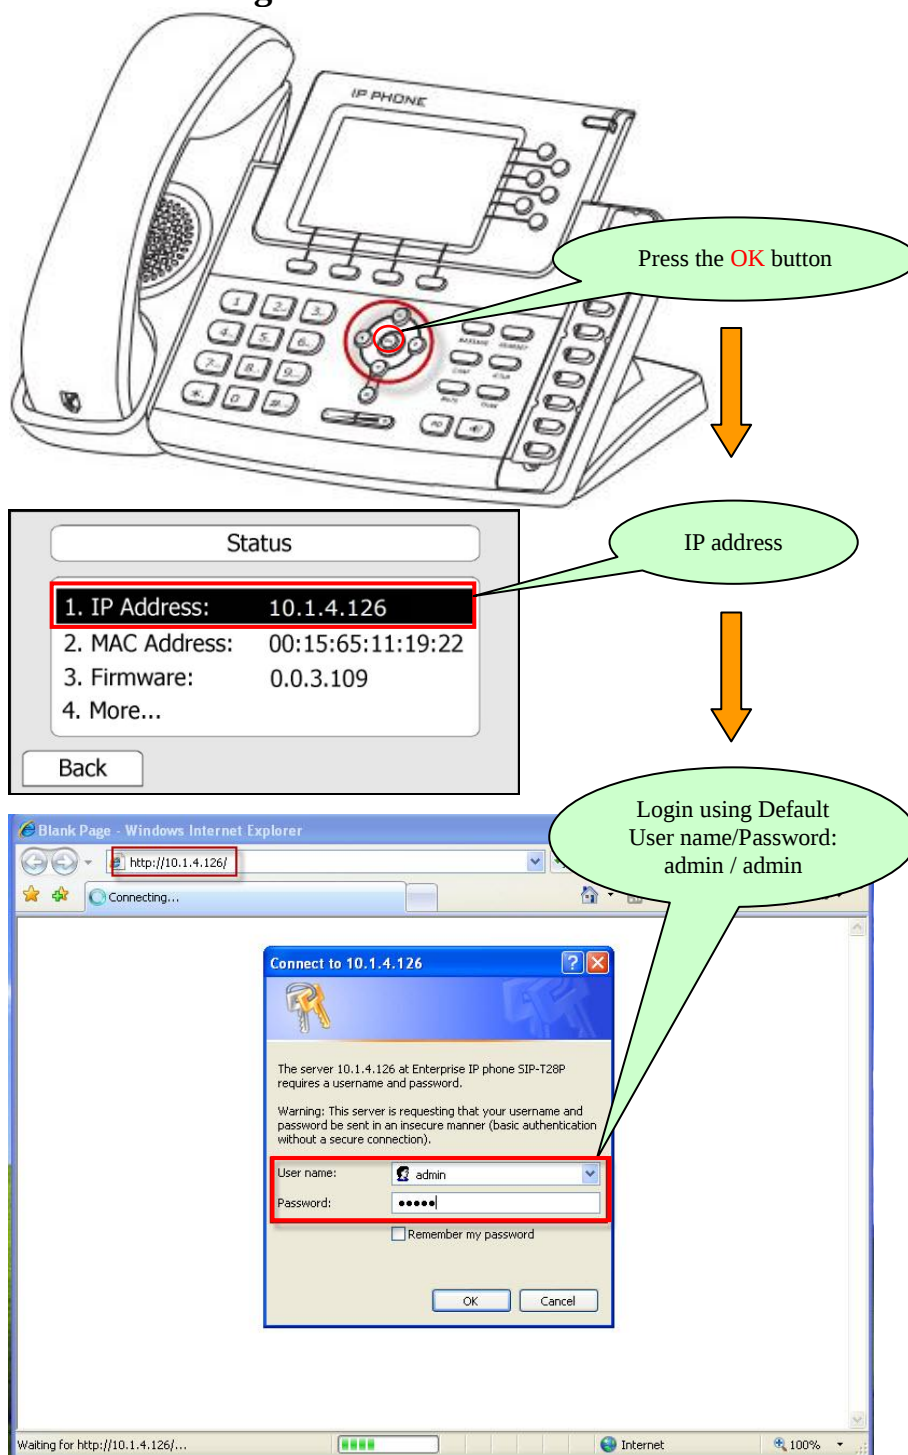

2.2 Configure the Account Settings

① Select "Account"

② Select one Account

③ Active Account

④ Fill in these fields

⑤ Voicemail code

check Note

NOTE

Display Name

User Name

Proxy Require

Advanced

The Advanced parameters for administrator.

Confirm Cancel

After entering the above Mail settings, Account1 will be available to make calls.

The screenshot is based on Yealink SIP-T28P. It is very similar for Yealink's other models.

Note : If the SIP server is behind a NAT, you should enable "NAT Traversal" as "STUN" and then specify a STUN Server. For more details about STUN, please refer to

<http://www.voip-info.org/wiki/view/STUN>. To learn about NAT, you should refer to

<http://www.voip-info.org/wiki/view/NAT+and+VOIP>

3. Configure on RingCentral

3.1 Login to RingCentral

Open your internet browser on PC, go to <http://www.ringcentral.com/>



In the login page, enter the given Phone Number, Extension and Password and then click SUBMIT

Thank you for using RingCentral!

Phone Number or User ID:

Extension (optional):

Numeric Password:

☐ Remember me on this computer

☐ Secure mode (use SSL)

Forgot your password? [Click here](#) for help.

3.2 SIP account information

1. Through RingCentral webpage, Click “My Settings” and you will find out your lines in “RingCentral DigitalLines”. If there is not, please contact RingCentral.
2. Find out your number there and check whether the extension is selected as “Ring Device Directly” which is recommended.

Phone Number	Forwarding Type	Status	Extension
Forward Existing Phone Number	More Info		

3. Click “Setup Instructions” to get the SIP account information for that line.

Field	Value
SIP Domain:	sip.ringcentral.com:5060
Outbound Proxy:	sip.ringcentral.com:5090
User Name:	14085406748
Password:	[masked]
Authorization ID:	9203660

The corresponding between the above information and the configurations on the phone is:

On RingCentral	On Yealink phone
SIP Domain	SIP server and port
Outbound Proxy	Outbound Proxy Server and port (Outbound proxy server should be enabled)
User Name	User Name
Password	Password
Authentication ID	Register Name

Reference

- ◆ www.ringcentral.com
- ◆ www.yealink.com